



- ▲ 30 or 60 minutes of fire resistance
- ▲ Tested in accordance with EN 1634-1, EN1634-3 and NEN 6069 - classified as interior pedestrian doors
- ▲ Available in Sa and S200 versions
- ▲ Suitable for frequent use

Fireway Radiation

FIRE-RESISTANT WOODEN INTERIOR DOOR

Hoefnagels Fire Safety supplies two models of wooden doors, in 30-minute and 60-minute fire-resistant versions. The doors can be supplied with additional burglary-, smoke- and sound-resistant properties.

STANDARD SPECIFICATIONS

Suitable for:	Interior spaces of offices, hotels, hospitals, schools, museums, theatres, libraries and more.
Mounting surface:	<ul style="list-style-type: none"> • EW30: high-density, low-density and flexible wall. • EW60: high-density, low-density and flexible wall.
Fire resistance:	30 minutes (EW30) or 60 minutes (EW60) on both sides, in combination with smoke resistance Sa or S200.
Test result:	Tested in accordance with EN 1634-1, EN1634-3 and NEN 6069. The doors are classified as interior pedestrian doors.
Suitable for:	Frequent use.
Door height/width:	H 2319 mm, W 926/1026 mm
Clear opening height/width:	H 2313 mm, W 902/1002 mm.
Other sizes on request.	
Frame:	Steel clamp construction, mounted on standard 100-mm thick wall and provided with a round seal strip. <ul style="list-style-type: none"> • Colour: crystal white
Door specifications:	Interior door, inset model constructed from mineral fibre board, with high-pressure laminate (HPL) cladding. <ul style="list-style-type: none"> • FSC mixed label certified. • Colour: RAL colours according to fan deck
Locks:	Fitted with W function and a door handle on both sides, without panic function.
Door fittings:	Door handle with PC55 rectangular shell.
Door closer:	Surface-mounted sliding arm.

MODELS

- Completely closed
- Large glass opening






OPTIONS

- Mounted DIN-left or DIN-right.
- Fire resistance 30 minutes (EW30) or 60 minutes (EW60).
- Smoke resistance Sa or S200.



Purveyor
to the
Royal Household

Fireway Radiation

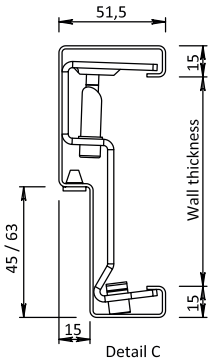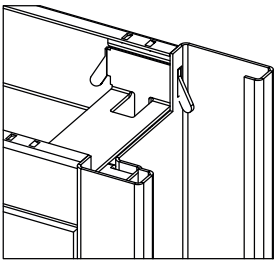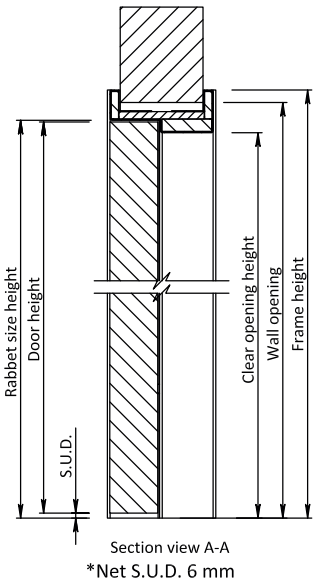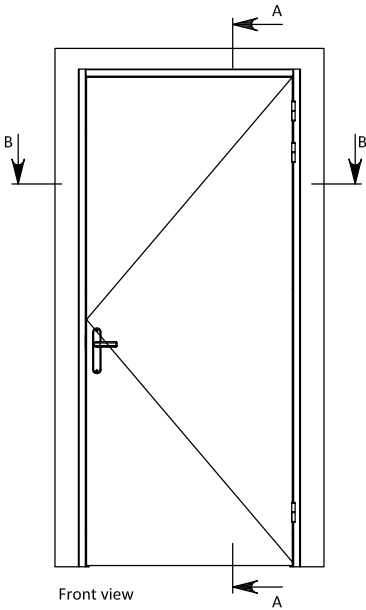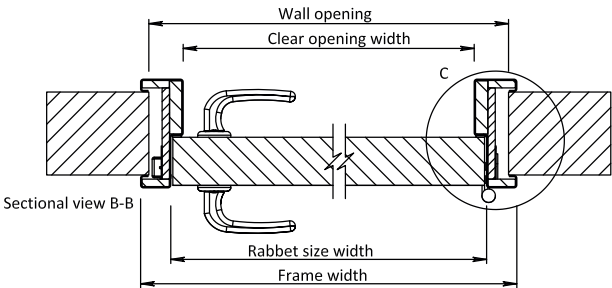

Hoefnagels Fire Safety
 Zevenheuvelenweg 50
 5048 AN Tilburg (NL)

Tel. +31 13 4625959
 info@hoefnagels.com
 www.hoefnagels.com

Avento RZ Single door inset					
Standard width and height dimensions					
Width dimensions Avento TZ single-door frame inset					
Door width production size	Rabbet width	Door width production size	Clear opening width	Wall opening (opening width) Tolerance +/- 5 mm	Frame width
926	932	926	902	976	1005
1026	1032	1026	1002	1076	1105

Height dimensions Avento RZ single door frame inset					
Door height production size	Rabbet height	Door undercut	Clear opening height	Wall opening (recess height) Tolerance +/- 5 mm	Frame height
2319	2328	6	2313	2349	2364